

## **Product Specification**

**USB Skype Handy Phone w/o LCD screen  
LB-SP130**

**Approval:** \_\_\_\_\_ **(Signature)**  
\_\_\_\_\_ **(Title)**  
\_\_\_\_\_ **(Company)**  
\_\_\_\_\_ **(Date)**

(Please Sign Back by FAX. For Confirming the Spec Only, not an Official Agreement for OEM/ODM Business)

## **PRODUCT DESCRIPTION**

LB-SP130 is the slimmest USB Skype phone in the world. The USB handy phone which designed for Skype software. You may control the Skype software just only press the keys of the phone. Through the keypad, it will operate the Dialing function, Select the phone listing. Beside, the echo-eliminating technology will improve the voice quality. LB-SP130 support MSN Messenger and Yahoo Messenger. You may just install by correct way, it will be very convenient just like a normal phone.

## **PRODUCT FEATURES**

Compliant USB 1.1 specification

Compliable with VoIP ( Voice over Internet Protocol ) solutions, such as Skype, MSN Messenger and Yahoo Messenger

Built in hot key functions to operate Skype software as easy as dialing a normal telephone  
Skype hot key , up , down , 0 ~ 9 \* # , OK off-hook, C on-hook , hold , info, melody select.

Built in speaker and microphone

Echo-eliminating for better sound quality

Buzzer function for incoming call alerts

Fashion look and human design

4 type music of ringer

**PRODUCT SPECIFICATIONS**


Interface	Compliant USB 1.1
Audio Frequency	100 Hz to 15KHz
Sinal/Noise Distortion	90 dB
Power Requirement	DC 5V
Current Consumption	90mA
Power Consumption	0.45Watt
Operate Temperature	0 to 40
Storage Temperature	-10 to 60
Operate Humidity	< 90%
Storage Humidity	< 95%
Support OS	Windows 2000 / XP
Skype API	Windows 2000 / XP
Dimension	108.0mm (L) x 46.0mm (W) x 13.0mm (H)
Weight	60.0g ( Main unit without cable )

**CASE DIMENSION: 108.0mm(L) x 46.0mm(W) x 13.0mm(H)**



*Limtation Version*

**HARDWARE AND BUTTON INTRODUCTION:**

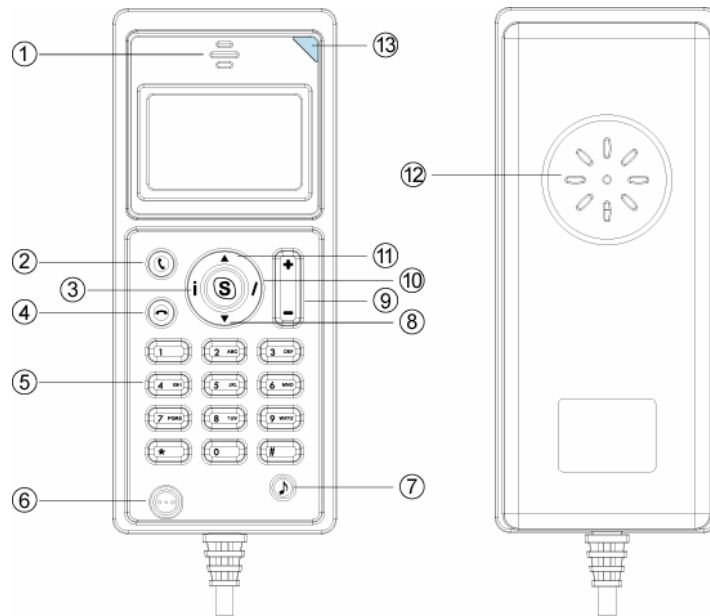

1	<b>Receiver</b>	Phone receiver
2	<b>Hang Up</b>	On-hook   hang-up a call
3	<b>Info</b>	USB phone setting information hot key
4	<b>Hang Off</b>	Hang-up a call
		Clear the wrong numbers
5	<b>Number Button</b>	Skype out dialer button
6	<b>Microphone</b>	Sensitive microphone
7	<b>Hold</b>	Skype hold or mute hot key
8	<b>Down</b>	Select list of contact list
9	<b>Vol +/-</b>	Volume select
10	<b>Melody</b>	Select the ringer music
11	<b>UP</b>	Select list of contact list
12	<b>Speaker</b>	Incoming call ringer
13	<b>LED</b>	Ringing LED

**ELECTRICAL**

Power request: DC5V

**CERTIFICATIONS**

CE, FCC